



Apr. 2015 Ver.3.0
TDK Corporation

Multilayer Antenna

For GPS / 2.4GHz W-LAN & Bluetooth / 5.5GHz W-LAN

ANT Series 1608 TYPE


P/N: **ANT025020LCT1575MA1**

ANT025020LCT1575MA1

■ SHAPES AND DIMENSIONS

[Top View]

[Bottom View]

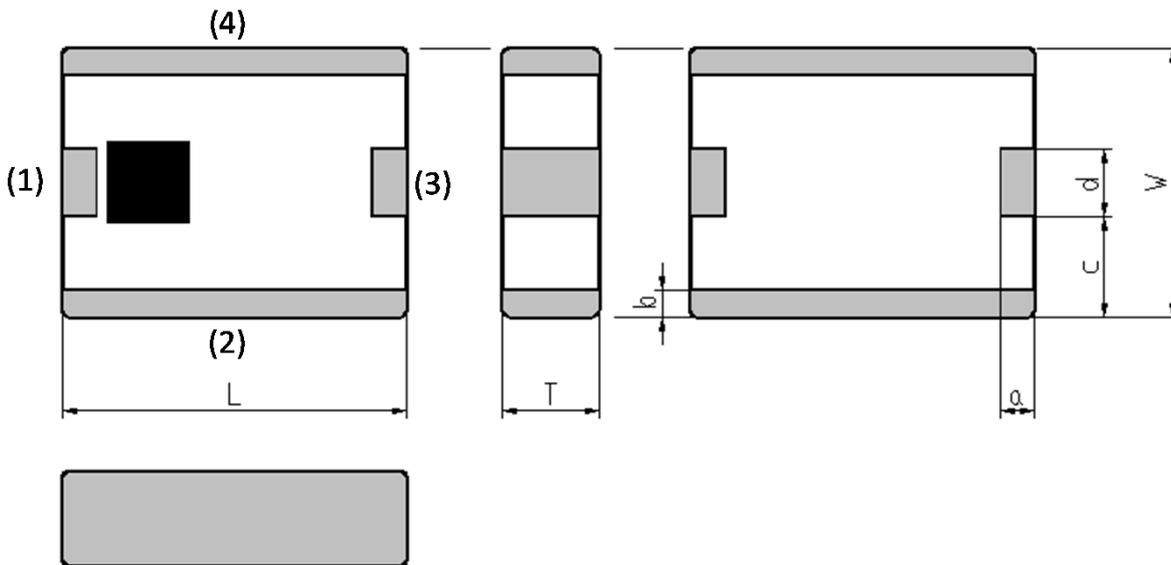

Dimensions (mm)

L	W	T	a	b	c	d
2.50	2.00	0.60	(0.21)	(0.21)	0.74	0.52
+/-0.20	+/-0.20	+/-0.10			+/-0.20	+/-0.20

Terminal functions

(1)	Radiator electrode for GPS
(2)	Radiator electrode for 5.5GHz
(3)	Feed point
(4)	Radiator electrode for 2.4GHz ISM

*Terminal (2),(3),(5) and (6) :Connected in inner structure

Note:

These samples are marked with trial sample identification.

In mass production, this sample marking will be changed to show in the TDK full specification.

■ TEMPERATURE RANGE

Operating temperature	Storage temperature
-40 to +85 °C	-40 to +85 °C

ANT025020LCT1575MA1

ELECTRICAL CHARACTERISTICS




(Measurement)

Parameter	Frequency (MHz)	TDK Spec		
		Min.	Typ.	Max.
VSWR	1574 to 1577	-	1.30	4.0
	2400 to 2484	-	1.80	4.0
	5150 to 5850	-	2.40	4.0
Polarization		Linear		
PCB Size (mm)		130 x 75		
Antenna keep-out Area (mm)		16 x 6		
Characteristic Impedance (ohm)		50 (Nominal)		

* This is typical antenna performance with the standard PCB.

FREQUENCY CHARACTERISTICS

Note: Tested antenna has been soldered. Evaluation board size is 130x75x1 mm.

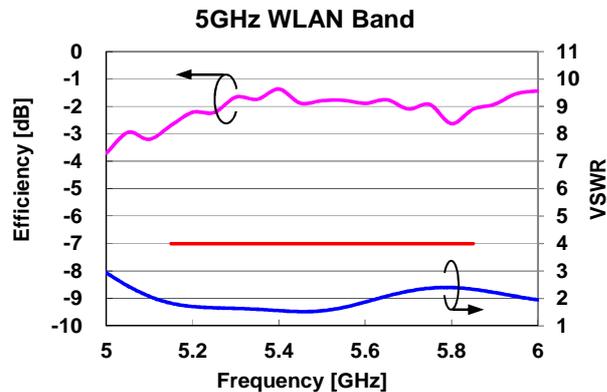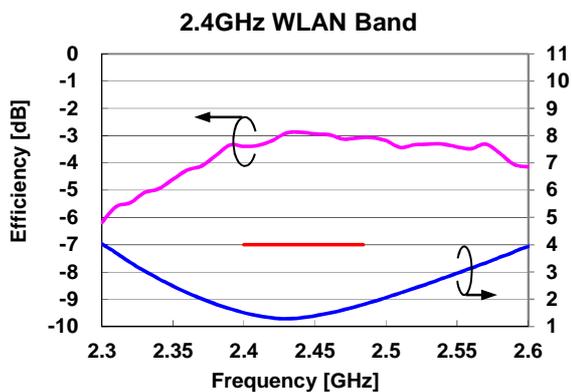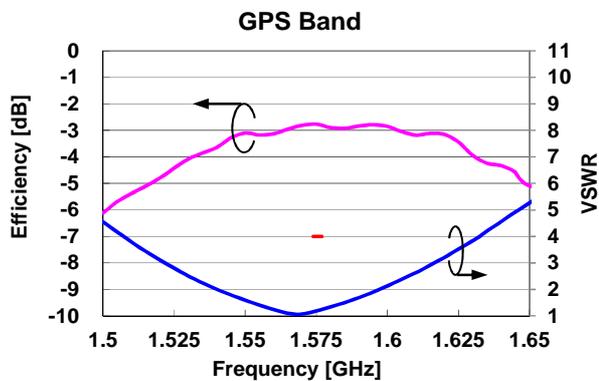


ANT025020LCT1575MA1

EVALUATION BOARD




PCB size : 130mm x 75mm x 1mm
Antenna area : 16 x 6 mm

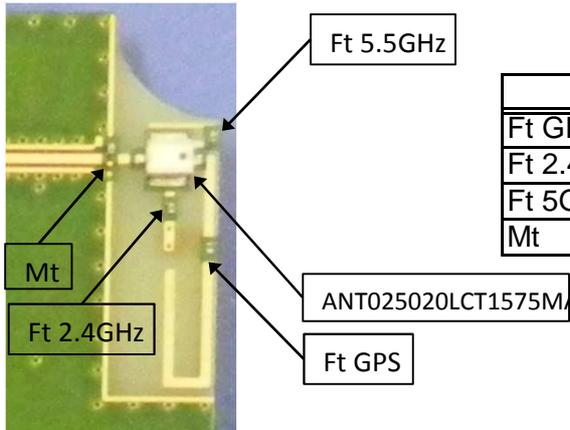

	Component P/N
Ft GPS	3.0nH
Ft 2.4GHz	1.6pF
Ft 5GHz	1.0nH
Mt	2.7nH


Measurement condition for Radiation Pattern

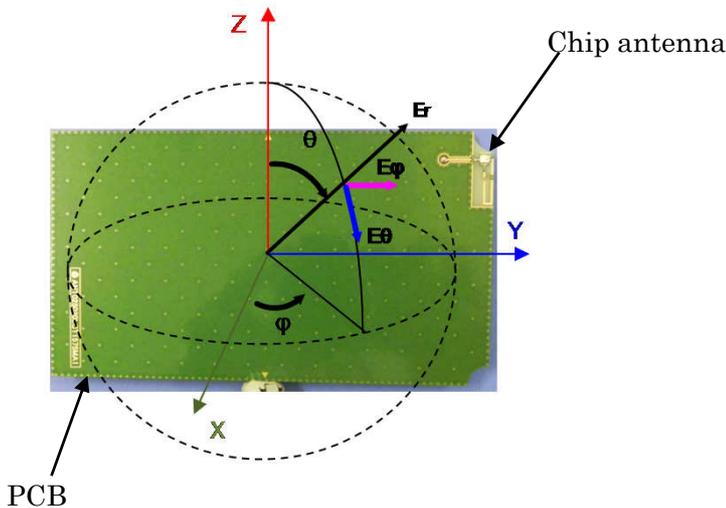

ANT025020LCT1575MA1

Radiation Pattern


Note: Tested antenna has been soldered. Evaluation board size is 130x75x1 mm.
GPS Band

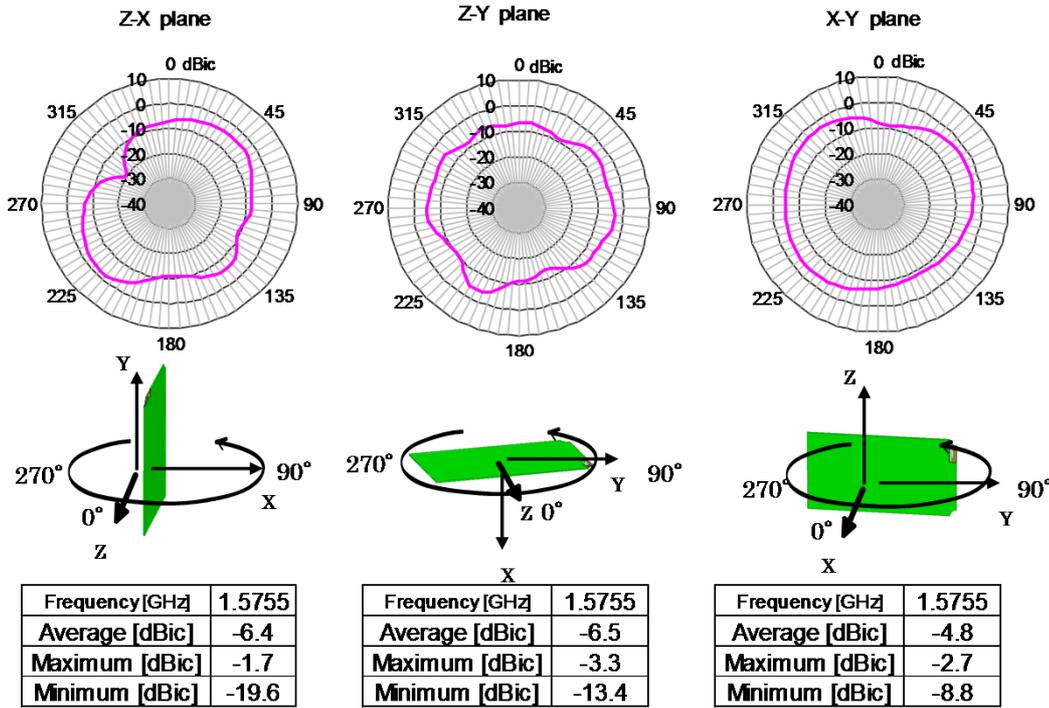

ANT025020LCT1575MA1

Radiation Pattern

Note: Tested antenna has been soldered. Evaluation board size is 130x75x1 mm.
2.4GHz ISM Band

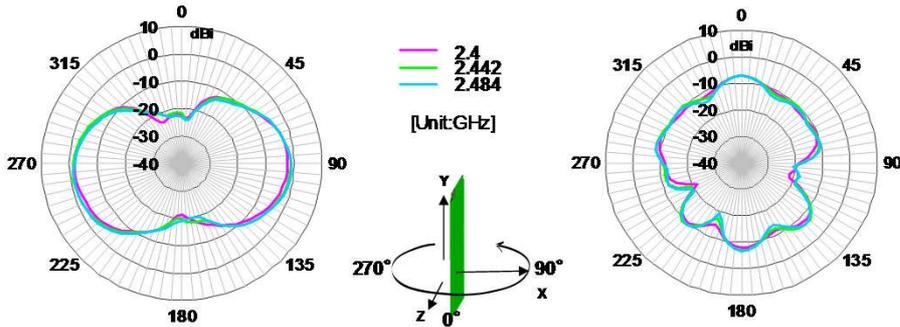


Horizontal Polarization

Frequency [GHz]	2.4	2.442	2.484
Average [dBi]	-6.7	-6.0	-6.0
Maximum [dBi]	-1.7	-1.1	-1.0
Minimum [dBi]	-23.6	-23.6	-24.1

Vertical Polarization

Frequency [GHz]	2.4	2.442	2.484
Average [dBi]	-10.8	-10.4	-10.7
Maximum [dBi]	-7.3	-6.7	-6.8
Minimum [dBi]	-21.7	-20.3	-20.8

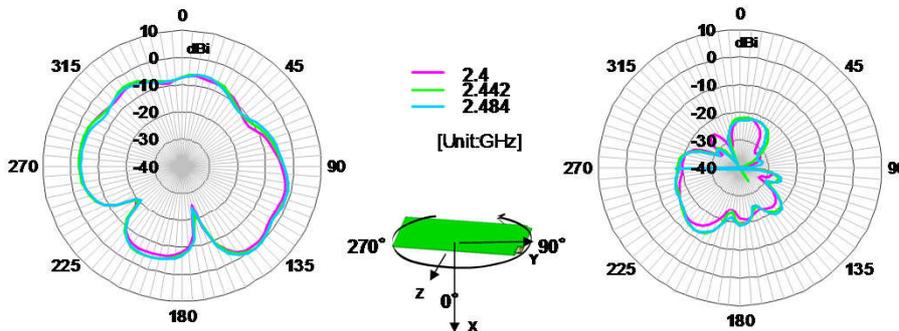


Horizontal Polarization

Frequency [GHz]	2.4	2.442	2.484
Average [dBi]	-5.4	-4.8	-4.9
Maximum [dBi]	-0.7	0.2	0.4
Minimum [dBi]	-25.3	-21.5	-24.3

Vertical Polarization

Frequency [GHz]	2.4	2.442	2.484
Average [dBi]	-21.1	-19.8	-19.9
Maximum [dBi]	-13.9	-12.1	-12.3
Minimum [dBi]	-44.8	-45.8	-62.6

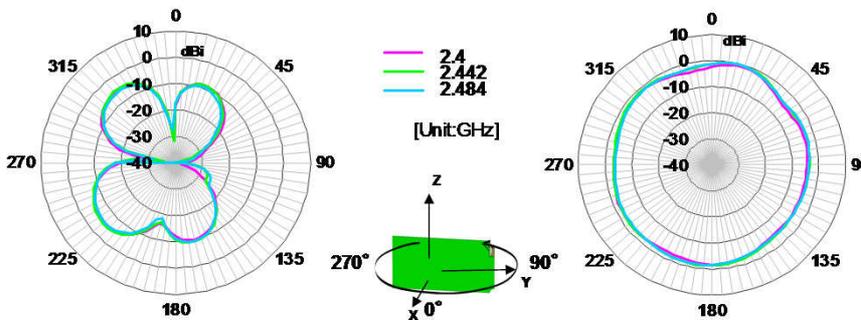

Horizontal Polarization

Frequency [GHz]	2.4	2.442	2.484
Average [dBi]	-10.5	-10.2	-11.0
Maximum [dBi]	-4.9	-4.6	-5.4
Minimum [dBi]	-38.2	-40.7	-62.6

Vertical Polarization


Frequency [GHz]	2.4	2.442	2.484
Average [dBi]	-2.8	-2.3	-2.5
Maximum [dBi]	-0.8	-0.2	-0.3
Minimum [dBi]	-5.0	-4.2	-4.3

All specifications are subject to change without notice.

ANT025020LCT1575MA1

Radiation Pattern

Note: Tested antenna has been soldered. Evaluation board size is 130x75x1 mm.
5.5GHz Band

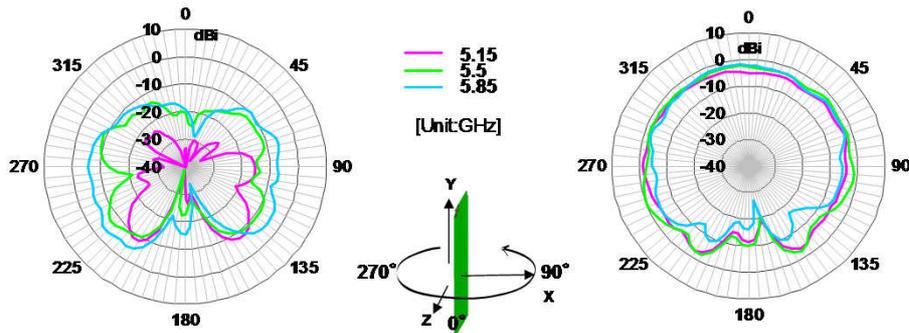


Horizontal Polarization

Frequency [GHz]	5.15	5.5	5.85
Average [dBi]	-16.4	-12.4	-8.6
Maximum [dBi]	-7.5	-7.1	-3.8
Minimum [dBi]	-40.0	-38.7	-33.9

Vertical Polarization

Frequency [GHz]	5.15	5.5	5.85
Average [dBi]	-4.4	-3.3	-5.0
Maximum [dBi]	-1.5	-0.5	-1.7
Minimum [dBi]	-19.1	-20.7	-27.1

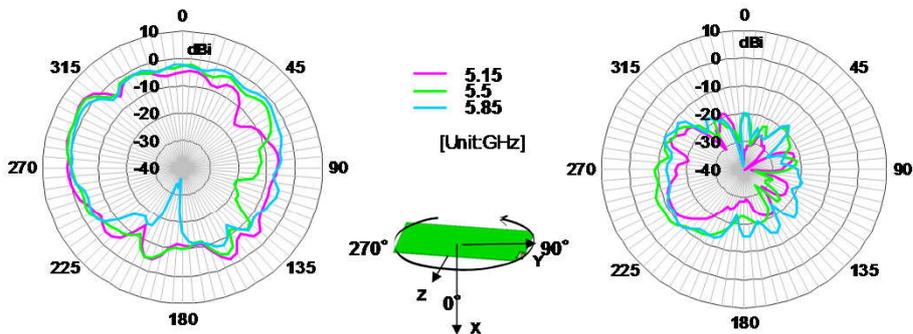


Horizontal Polarization

Frequency [GHz]	5.15	5.5	5.85
Average [dBi]	-3.3	-3.5	-3.6
Maximum [dBi]	3.3	2.8	1.5
Minimum [dBi]	-15.7	-20.6	-35.9

Vertical Polarization

Frequency [GHz]	5.15	5.5	5.85
Average [dBi]	-18.8	-14.8	-15.6
Maximum [dBi]	-11.3	-7.4	-9.6
Minimum [dBi]	-40.0	-36.2	-38.6

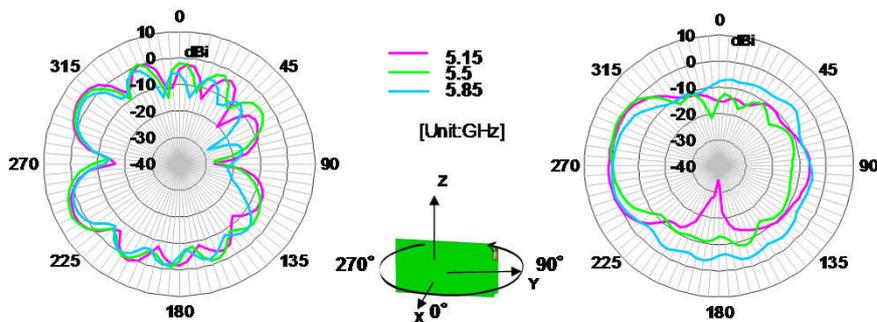

Horizontal Polarization

Frequency [GHz]	5.15	5.5	5.85
Average [dBi]	-2.5	-2.2	-4.0
Maximum [dBi]	4.1	4.0	2.4
Minimum [dBi]	-26.9	-27.2	-28.1

Vertical Polarization

Frequency [GHz]	5.15	5.5	5.85
Average [dBi]	-5.1	-6.0	-4.3
Maximum [dBi]	1.0	1.2	0.1
Minimum [dBi]	-34.5	-21.4	-11.0

All specifications are subject to change without notice.

Apr. 2015 Ver.3.0
TDK Corporation

ANT025020LCT1575MA1


■ ENVIROMENT INFORMATION

RoHS Statement
RoHS Compliance

ANT025020LCT1575MA1

■ RECOMMENDED REFLOW PROFILE

Pb free solder

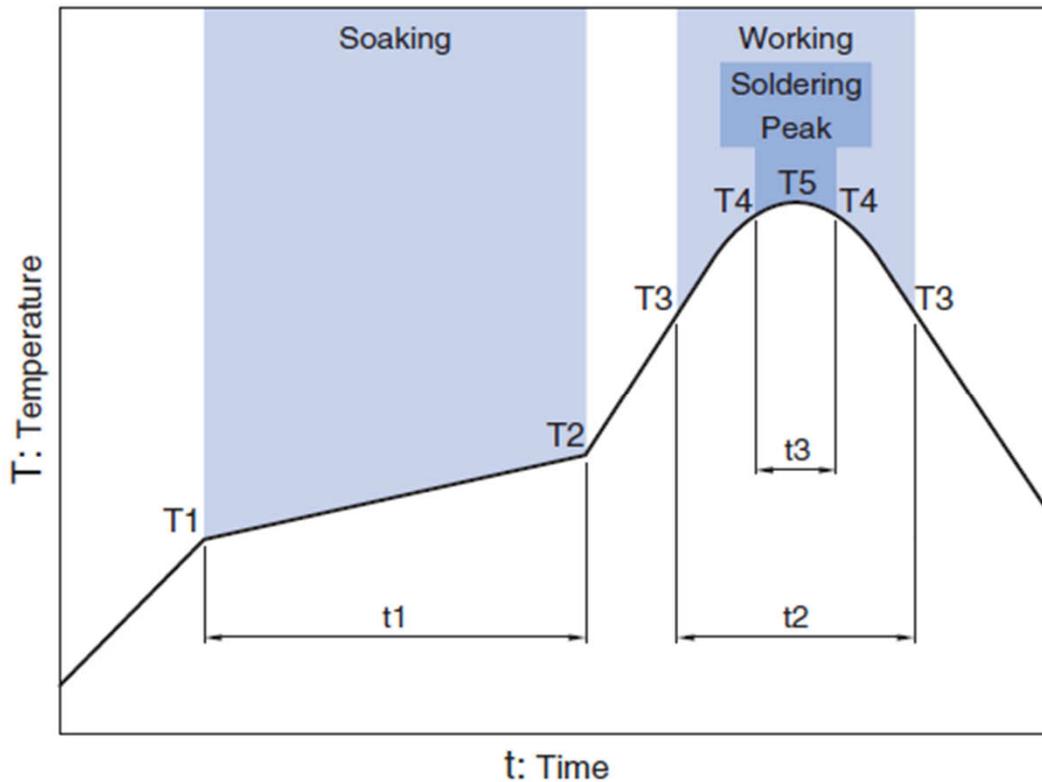


Soaking			Working		Soldering		Peak
Temp.	Temp.	Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	30 to 60sec	247 to 253°C	within 10sec	260°C Max.


ANT025020LCT1575MA1

PACKAGING STYLE

Reel Dimensions

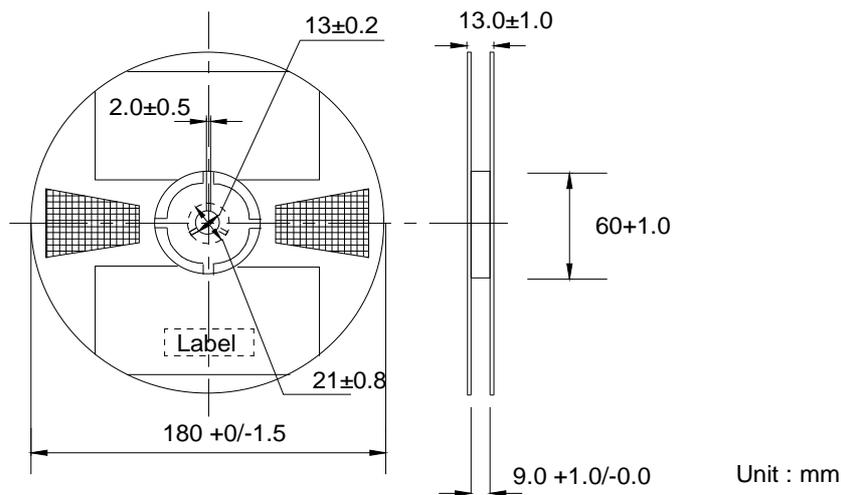

Carrier Tape

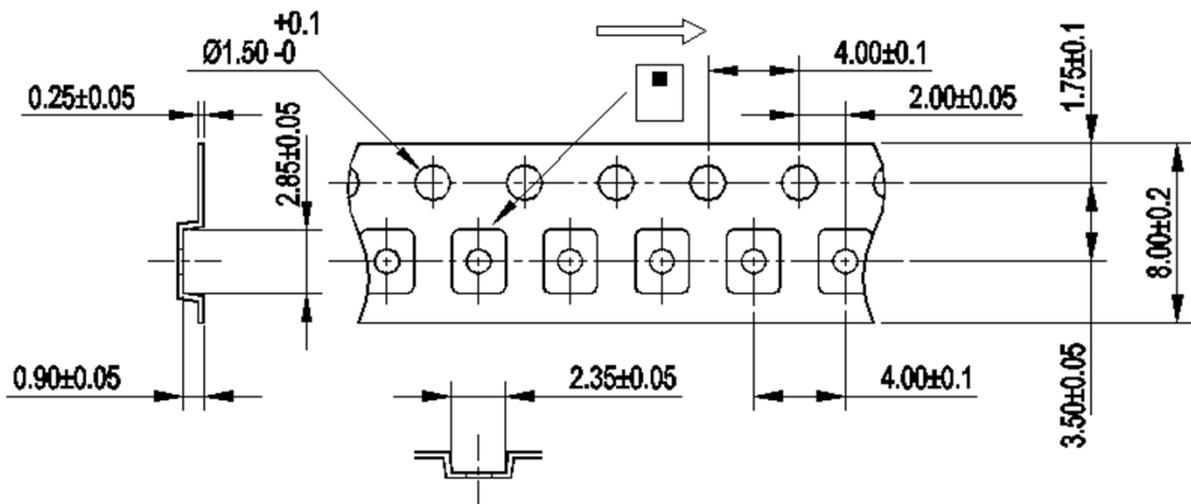

STANDARD PACKAGE QUANTITY (pieces/reel)
2,000

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

 REMINDERS
--

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

1. Aerospace/Aviation equipment
2. Transportation equipment (cars, electric trains, ships, etc.)
3. Medical equipment
4. Power-generation control equipment
5. Atomic energy-related equipment
6. Seabed equipment
7. Transportation control equipment
8. Public information-processing equipment
9. Military equipment
10. Electric heating apparatus, burning equipment
11. Disaster prevention/crime prevention equipment
12. Safety equipment
13. Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.