
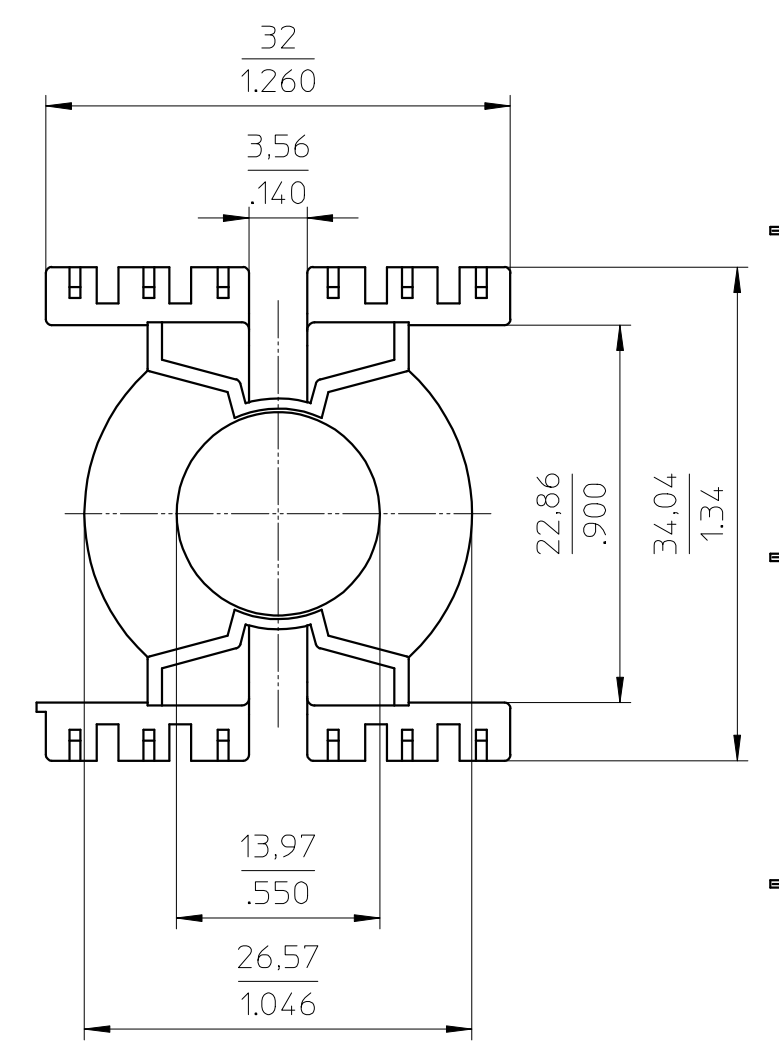
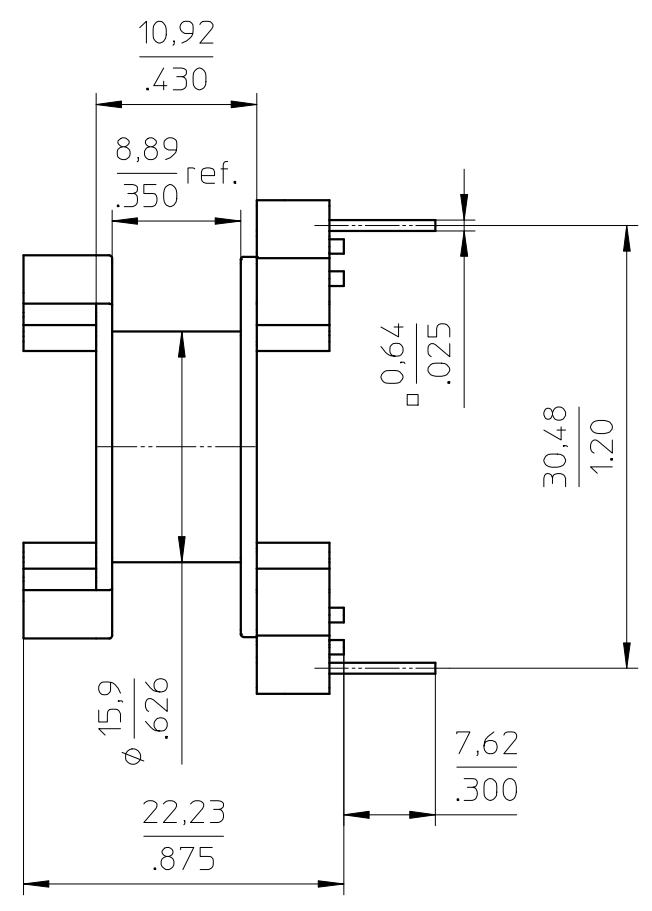
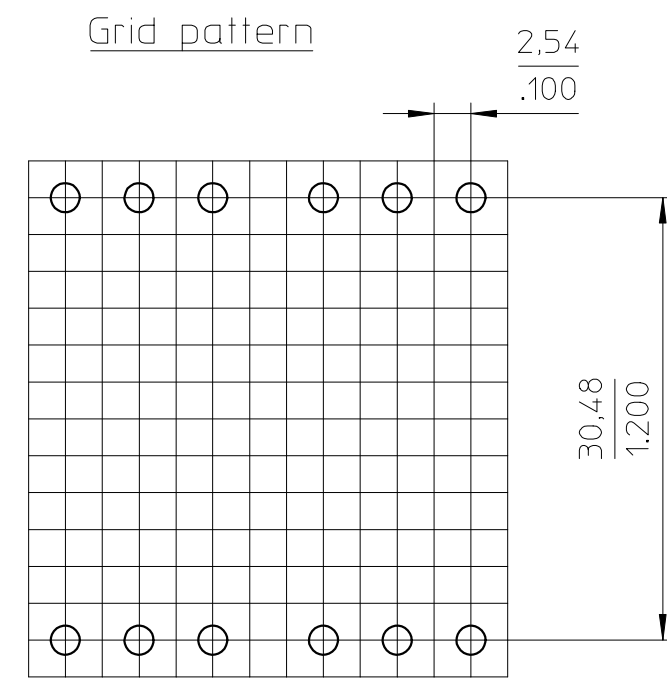


FERROXCUBE

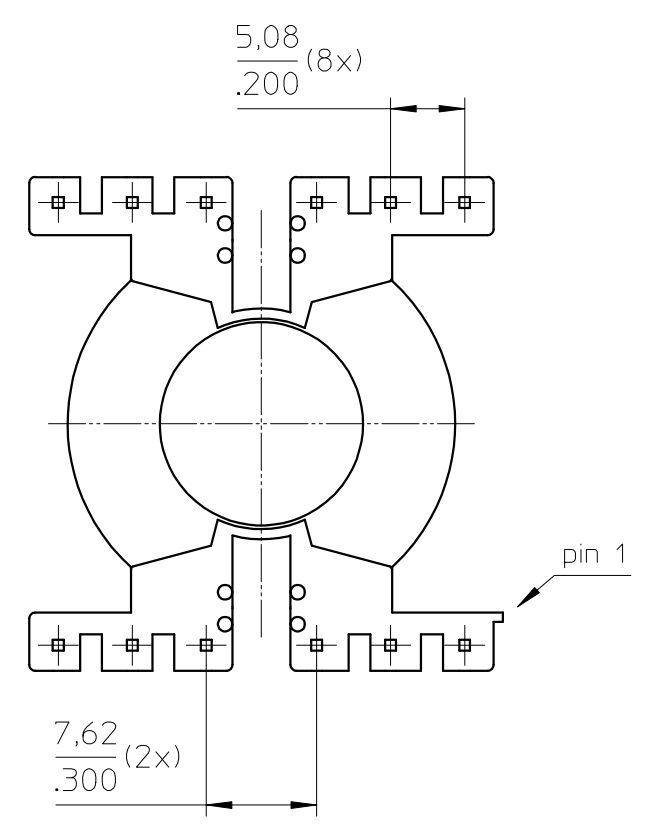

Coil former material: Rynite FR530 (PET), glass-reinforced, (color black).
UL file number: E41938 - UL94V-0.

max. operating temp: 180°C, class H

pin material: Copper-plated steel wire, Sn plated.

solderability: acc. to IEC 60068-2-20 part2, Test Ta method 1, 235C-2sec.

mean length of turn: 2.626 inch

winding area: 0.074 sq. inch.

CLASS.NO.		CPV-PQ32/20-1S-12P-Z		4335 060 26791		06-02-22	
NAME NAAM	A.Wojtasz		SUPERS. VERY.	SH SH		—	
MPA		CHECK CONTR.	DAT.	06-02-22	Property of Eigendom van	© FERROXCUBE 2000	A3